

ISUZU
TRUCK

N-SERIES

For additional information
on Isuzu's full line of
Low Cab Forward trucks

please visit **www.isuzucv.com**
or call **(866) 441-9638**

All photographs, illustrations, equipment and technical data in this brochure are based on the latest information available at the time of publication. Isuzu Commercial Truck of America, Inc. reserves the right to make changes at any time, without notice, in prices, colors, materials, equipment, specifications and models, and to discontinue models or equipment. Isuzu vehicles are assembled from component parts manufactured by Isuzu Motors Limited, its affiliated companies, and by independent suppliers who manufacture such components to Isuzu's exacting standards for quality, performance and safety. Some vehicles are shown with optional equipment. Some equipment is dealer installed. Visit your authorized Isuzu dealer for warranty and other details. NPR, NPR-HD, NPR-XD, NQR, and NRR are trademarks of Isuzu Motors Limited. Truck bodies represented herein are products of Supreme Corporation, M.H.Eby, Inc., Morgan Corporation, The Reading Group LLC, Tymco, Inc., Switch N Go a division of Deist Industries, Inc., Aero Tech Manufacturing, Inc., Thermo King, and New Way Refuse Trucks a product of Scranton Manufacturing Company. Facebook is a registered trademark of Facebook, Inc. Instagram is a registered trademark of Instagram, LLC. Twitter is a registered trademark of Twitter, Inc. LinkedIn is a registered trademark of LinkedIn Corporation. Google+ is a registered trademark of Google, Inc. Isuzu is not sponsored by or affiliated with these platforms.



TM10203 (3/16)

Copyright © 2016 Isuzu Commercial Truck of America, Inc.

GAS



ISUZU NPR

Gas or CNG/LPG Capable
12,000 lb. GVWR
Body of your choice
up to 20 ft.*

ISUZU NPR HD

Gas or CNG/LPG Capable
14,500 lb. GVWR
Body of your choice
up to 20 ft.*

* Wheelbase dimension determines maximum body length

N-SERIES GAS

The Only Gas Low Cab Forward in the Medium Duty Market

Standard Cab:

Body choices 10 ft. to 20 ft.*
GVWRs 12,000 lbs. to 14,500 lbs.
Wheelbases 109.0 in. to 176.0 in.

Crew Cab: Seating for Seven

Body choices 12 ft. to 16 ft.*
GVWRs 12,000 lbs. to 14,500 lbs.
Wheelbases 150.0 in. to 176.0 in.

Easy to Drive: Outstanding driver visibility and maneuverability that provides an exceptional driving experience



Gas Choices

297hp 6.0L with
CNG/LPG Capability



ISUZU NPR

CREW CAB

Gas or CNG/LPG Capable
12,000 lb. GVWR
Body of your choice
up to 16 ft.*

ISUZU NPR HD

CREW CAB

Gas or CNG/LPG Capable
14,500 lb. GVWR
Body of your choice
up to 16 ft.*

DIESEL



N-SERIES DIESEL

13,000 lbs. GVWR - 19,950 lbs. GVWR

Standard Cab:

Body choices 10 ft. to 24 ft.*
GVWRs 13,000 lbs. to 19,500 lbs.
Wheelbases 109.0 in. to 212.0 in.

Crew Cab: Seating for Seven

Body choices 12 ft. to 16 ft.*
GVWRs 14,500 lbs. to 17,950 lbs.
Wheelbases 150.0 in. to 176.0 in.

Easy to Drive: Outstanding driver visibility and maneuverability that provides an exceptional driving experience

ISUZU **NPR**

150 hp. 3.0L
13,000 lb. GVWR
Body of your choice
up to 20 ft.*

ISUZU **NPR HD**

215 hp. 5.2L
14,500 lb. GVWR
Body of your choice
up to 20 ft.*

ISUZU **NPR XD**

215 hp. 5.2L
16,000 lb. GVWR
Body of your choice
up to 20 ft.*

ISUZU **NQR**

215 hp. 5.2L
17,950 lb. GVWR
Body of your choice
up to 22 ft.*

ISUZU **NRR**

215 hp. 5.2L
19,500 lb. GVWR
Body of your choice
up to 24 ft.*

ISUZU **NPR HD**

215 hp. 5.2L
14,500 lb. GVWR
Body of your choice
up to 16 ft.*

ISUZU **NPR XD**

215 hp. 5.2L
16,000 lb. GVWR
Body of your choice
up to 16 ft.*



ISUZU **NQR**

215 hp. 5.2L
17,950 lb. GVWR
Body of your choice
up to 16 ft.*

CREW CAB

* Wheelbase dimension determines maximum body length

N-Series Dimensions

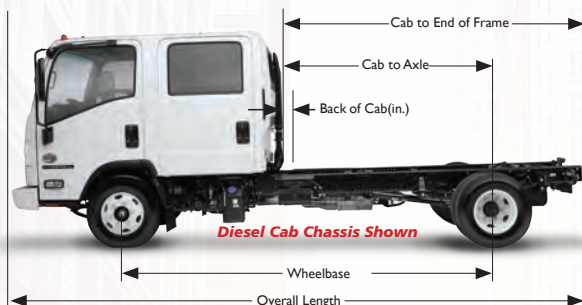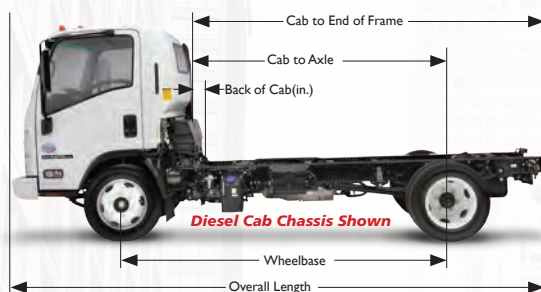

NPR-HD / NPR-XD / NQR DIESEL CREW CAB

| Wheelbase (in.) | Cab to Axle (in.) | Cab to End of Frame (in.) | Back of Cab (in.) | Overall Length (in.) | Overall Width (in.) | Axle Width (in.) | Overall Height (in.) | Body Length (ft.) |
|-----------------|-------------------|---------------------------|-------------------|----------------------|---------------------|------------------|----------------------|-------------------|
| 150.0 | 88.5 | 131.6 | 5.3 | 241.5 | 81.3 | 65.6 | 90.8/92.4* | 12 |
| 176.0 | 114.5 | 157.6 | 5.3 | 267.5 | 81.3 | 65.6 | 90.8/92.4* | 16 |

*NPR-HD Crew Cab/NPR-XD Crew Cab, NQR Crew Cab

NPR / NPR-HD GAS CREW CAB

| Wheelbase (in.) | Cab to Axle (in.) | Cab to End of Frame (in.) | Back of Cab (in.) | Overall Length (in.) | Overall Width (in.) | Axle Width (in.) | Overall Height (in.) | Body Length (ft.) |
|-----------------|-------------------|---------------------------|-------------------|----------------------|---------------------|------------------|----------------------|-------------------|
| 150.0 | 88.5 | 131.6 | 5.0 | 241.5 | 81.3 | 65.6 | 90.0/91.1 | 12 |
| 176.0 | 114.5 | 157.6 | 5.0 | 267.5 | 81.3 | 65.6 | 90.0/91.1 | 16 |


2016/2017 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

| Vehicle Coverage | Warranty Limitations (Time or Mileage, Whichever Comes First)* | | Percentage Of Dealer's Normal Charge Paid By Owner | |
|---|--|----------------|--|-----------|
| | Time in years* | Vehicle miles* | Parts | Labor |
| Basic | 0-3 Years | Unlimited | No Charge | No Charge |
| Engine | 0-3 Years | Unlimited | No Charge | No Charge |
| • Transmission • Drive Axle • Driveshaft • Front Axle I-Beam • Crossmembers • Flywheel Housing • Clutch Housing | 0-3 Years | Unlimited | No Charge | No Charge |
| Frame Rails | 0-3 Years | Unlimited | No Charge | 50% |
| Engine Emissions Control System - Federal | 3-5 Years | Unlimited | 50% | 50% |
| California Emissions Performance NPR | 0-5 Years | 0-100,000 | No Charge | No Charge |
| California Emissions Long-Term Defects NPR | 0-3 Years | 0-50,000 | No Charge | No Charge |
| Tires | 0-7 Years | 0-70,000 | No Charge | No Charge |
| Corrosion (Rust Through) | 0-2 Years | 0-24,000 | No Charge | No Charge |
| | 0-4 Years | Unlimited | No Charge | No Charge |

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
See your authorized Isuzu dealer for warranty details.

Diesel (Illustrated) **Gas** (See Charts)

N-SERIES TRUCKS

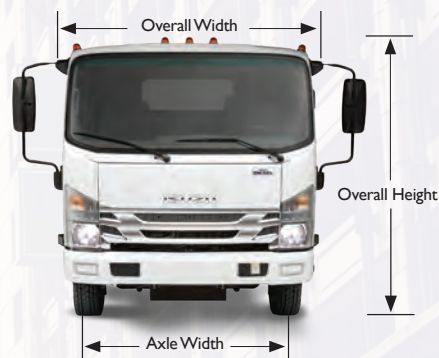

NPR, NPR-HD, NPR-XD, NQR, NRR

| Wheelbase (in.) | Cab to Axle (in.) | Cab to End of Frame (in.) | Back of Cab (in.) | Overall Length (in.) | Overall Width (in.) | Axle Width (in.) | Overall Height (in.) | Body Length (ft.) |
|-----------------|-------------------|---------------------------|-------------------|----------------------|---------------------|------------------|----------------------|-------------------|
| 109.0 | 86.5 | 129.6 | 7.7 | 200.5 | 81.3 | 65.6 | 90.8/92.4** | 10-12 |
| 132.5 | 110.0 | 153.1 | 7.7 | 224.0 | 81.3 | 65.6 | 90.8/92.4** | 14 |
| 150.0 | 127.5 | 170.6 | 7.7 | 241.5 | 81.3 | 65.6 | 90.8/92.4** | 16-18 |
| 176.0 | 153.5 | 196.6 | 7.7 | 267.5 | 81.3 | 65.6 | 90.8/92.4** | 18-20 |
| 200.0† | 177.5 | 220.6 | 7.7 | 291.5 | 81.3 | 65.6 | 92.4 | 22 |
| 212.0†† | 189.5 | 232.6 | 7.7 | 303.5 | 81.3 | 65.6 | 92.4 | 24 |

†NPR-HD only 10.2 ††NQR, NRR only †††NRR only *NPR only 6.1
**NPR, NPR-HD/NPR-XD, NQR, NRR

NPR / NPR-HD GAS

| Wheelbase (in.) | Cab to Axle (in.) | Cab to End of Frame (in.) | Back of Cab (in.) | Overall Length (in.) | Overall Width (in.) | Axle Width (in.) | Overall Height (in.) | Body Length (ft.) |
|-----------------|-------------------|---------------------------|-------------------|----------------------|---------------------|------------------|----------------------|-------------------|
| 109.0 | 86.5 | 129.6 | 6.5 | 200.5 | 81.3 | 65.6 | 90.8 | 10-12 |
| 132.5 | 110.0 | 153.1 | 6.5 | 224.0 | 81.3 | 65.6 | 90.8 | 14 |
| 150.0 | 127.5 | 170.6 | 6.5 | 241.5 | 81.3 | 65.6 | 90.8 | 16-18 |
| 176.0 | 153.5 | 196.6 | 6.5 | 267.5 | 81.3 | 65.6 | 90.8 | 18-20 |

2016 ISUZU N-SERIES GAS WARRANTY COVERAGE AT A GLANCE

| Vehicle Coverage | Warranty Limitations (Time or Mileage, Whichever Comes First)* | | Percentage Of Dealer's Normal Charge Paid By Owner | |
|---|--|----------------|--|-----------|
| | Time in years* | Vehicle miles* | Parts | Labor |
| Basic | 0-3 Years | 0-36,000 | No Charge | No Charge |
| Engine | 0-5 Years | 0-75,000 | No Charge | No Charge |
| • Transmission • Drive Axle • Driveshaft • Front Axle I-Beam • Crossmembers | 0-5 Years | 0-75,000 | No Charge | No Charge |
| Frame Rails | 0-3 Years | 0-36,000 | No Charge | No Charge |
| | 3-5 Years | Unlimited | 50% | 50% |
| Federal Emissions | 0-5 Years | 0-50,000 | No Charge | No Charge |
| Engine Emissions Control System (NPR model) California | 0-3 Years | 0-50,000 | No Charge | No Charge |
| Engine Emissions Control System (NPR model) California | 0-7 Years | 0-70,000 | No Charge | No Charge |
| Tires | 0-2 Years | 0-24,000 | No Charge | No Charge |
| Corrosion (Rust Through) | 0-4 Years | Unlimited | No Charge | No Charge |

**GAS N-SERIES
SPECIFICATIONS**

| | |
|---------------------------|---------------------------------|
| GVWR/GCWR | 12,000/18,000 lbs. |
| BODY/PAYLOAD ALLOWANCE | 6,782-6,978 lbs. |
| GAWR | |
| Front | 4,860 lbs. |
| Rear | 8,840 lbs. |
| FRONT AXLE CAPACITY | 6,830 lbs. |
| REAR AXLE CAPACITY | 11,020 lbs. |
| Ratio | 5.125 |
| SUSPENSION F/R SPRINGS | Tapered/Multi-Leaf |
| Capacity | 8,440/12,900 lbs. |
| FRAME | |
| Section Modulus | 7.20 in.3 |
| Resistance Bending Moment | 316,800 lb.-ft./in. |
| SERVICE BRAKES | Vacuum/Hydraulic with |
| Front/Rear | 4-Channel ABS Disc/Drum |
| TRANSMISSION | 6L90 6-speed auto. with |
| | double overdrive and |
| | lock-up converter |
| ENGINE | GMPT L96 (Gen IV) V8 Vortec |
| | 6000 (Optional: KL8-Alternative |
| | Fuel Capable Engine) |
| Displacement | 6.0L (365 in.3) |
| Engine Power | 297hp @ 4,300 rpm |
| Engine Torque | 372 lb.-ft. @ 4,000 rpm |
| LIMITED SLIP DIFFERENTIAL | Optional |
| ALTERNATOR | 145-amp |
| BATTERIES | 1 Maintenance-Free |
| | 750-CCA |
| TIRES LRR | 215/85R16E (10-pr) |
| (Low Rolling Resistance) | Standard |
| STEERING | Integral Hydraulic Power |
| STEERING COLUMN | Tilt and Telescopic |
| FUEL TANK | 30 Gal. in-frame |

**NPR
GAS**

| |
|---------------------------------|
| 12,000/18,000 lbs. |
| 6,782-6,978 lbs. |
| |
| 4,860 lbs. |
| 8,840 lbs. |
| 6,830 lbs. |
| 11,020 lbs. |
| 5.125 |
| Tapered/Multi-Leaf |
| 8,440/12,900 lbs. |
| |
| 7.20 in.3 |
| 316,800 lb.-ft./in. |
| Vacuum/Hydraulic with |
| 4-Channel ABS Disc/Drum |
| 6L90 6-speed auto. with |
| double overdrive and |
| lock-up converter |
| GMPT L96 (Gen IV) V8 Vortec |
| 6000 (Optional: KL8-Alternative |
| Fuel Capable Engine) |
| 6.0L (365 in.3) |
| 297hp @ 4,300 rpm |
| 372 lb.-ft. @ 4,000 rpm |
| Optional |
| 145-amp |
| 1 Maintenance-Free |
| 750-CCA |
| 215/85R16E (10-pr) |
| Standard |
| Integral Hydraulic Power |
| Tilt and Telescopic |
| 30 Gal. in-frame |

**NPR
GAS CREW CAB**

| |
|---------------------------------|
| 12,000/18,000 lbs. |
| 6,246-6,308 lbs. |
| |
| 4,860 lbs. |
| 8,840 lbs. |
| 6,830 lbs. |
| 11,020 lbs. |
| 5.125 |
| Tapered/Multi-Leaf |
| 8,440/12,900 lbs. |
| |
| 7.20 in.3 |
| 316,800 lb.-ft./in. |
| Vacuum/Hydraulic with |
| 4-Channel ABS Disc/Drum |
| 6L90 6-speed auto. with |
| double overdrive and |
| lock-up converter |
| GMPT L96 (Gen IV) V8 Vortec |
| 6000 (Optional: KL8-Alternative |
| Fuel Capable Engine) |
| 6.0L (365 in.3) |
| 297hp @ 4,300 rpm |
| 372 lb.-ft. @ 4,000 rpm |
| Optional |
| 145-amp |
| 1 Maintenance-Free |
| 750-CCA |
| 215/85R16E (10-pr) |
| Standard |
| Integral Hydraulic Power |
| Tilt and Telescopic |
| 30 Gal. in-frame |

**NPR-HD
GAS**

| |
|---------------------------------|
| 14,500/20,500 lbs. |
| 8,977-9,174 lbs. |
| |
| 6,630 lbs. |
| 11,020 lbs. |
| 6,830 lbs. |
| 11,020 lbs. |
| 5.375 |
| Tapered/Multi-Leaf |
| 8,440/12,900 lbs. |
| |
| 7.20 in.3 |
| 316,800 lb.-ft./in. |
| Vacuum/Hydraulic with |
| 4-Channel ABS Disc/Drum |
| 6L90 6-speed auto. with |
| double overdrive and |
| lock-up converter |
| GMPT L96 (Gen IV) V8 Vortec |
| 6000 (Optional: KL8-Alternative |
| Fuel Capable Engine) |
| 6.0L (365 in.3) |
| 297hp @ 4,300 rpm |
| 372 lb.-ft. @ 4,000 rpm |
| Optional |
| 145-amp |
| 1 Maintenance-Free |
| 750-CCA |
| 225/70R19.5G (14-pr) |
| Standard |
| Integral Hydraulic Power |
| Tilt and Telescopic |
| 30 Gal. in-frame |

**NPR-HD
GAS CREW CAB**

| |
|---------------------------------|
| 14,500/20,500 lbs. |
| 8,442-8,503 lbs. |
| |
| 6,630 lbs. |
| 11,020 lbs. |
| 6,830 lbs. |
| 11,020 lbs. |
| 5.375 |
| Tapered/Multi-Leaf |
| 8,440/12,900 lbs. |
| |
| 7.20 in.3 |
| 316,800 lb.-ft./in. |
| Vacuum/Hydraulic with |
| 4-Channel ABS Disc/Drum |
| 6L90 6-speed auto. with |
| double overdrive and |
| lock-up converter |
| GMPT L96 (Gen IV) V8 Vortec |
| 6000 (Optional: KL8-Alternative |
| Fuel Capable Engine) |
| 6.0L (365 in.3) |
| 297hp @ 4,300 rpm |
| 372 lb.-ft. @ 4,000 rpm |
| Optional |
| 145-amp |
| 1 Maintenance-Free |
| 750-CCA |
| 225/70R19.5G (14-pr) |
| Standard |
| Integral Hydraulic Power |
| Tilt and Telescopic |
| 30 Gal. in-frame |

DIESEL N-SERIES NPR SPECIFICATIONS

| | | |
|---|---|---|
| GVWR/GCWR | 13,000/19,000 lbs. | 14,500/20,500 lbs. |
| BODY/PAYLOAD ALLOWANCE | 7,435-7,607 lbs. | 8,339-8,536 lbs. |
| GAWR | | |
| Front | 5,360 lbs. | 5,360 lbs. |
| Rear | 9,880 lbs. | 9,880 lbs. |
| FRONT AXLE CAPACITY | 6,830 lbs. | 6,830 lbs. |
| REAR AXLE CAPACITY | 11,020 lbs. | 11,020 lbs. |
| Ratio | 5.125 | 4.555 |
| SUSPENSION F/R SPRINGS | Tapered/Multi-Leaf | Tapered/Multi-Leaf |
| Capacity | 6,830/9,880 lbs. | 6,830/9,880 lbs. |
| FRAME | | |
| Section Modulus | 7.20 in. ³ | 7.20 in. ³ |
| Resistance Bending Moment | 316,800 lb.-ft./in. | 316,800 lb.-ft./in. |
| SERVICE BRAKES | Vacuum/Hydraulic with 4-Channel ABS Disc/Drum | Vacuum/Hydraulic with 4-Channel ABS Disc/Drum |
| Front/Rear | | |
| EXHAUST BRAKE | Standard | Standard |
| TRANSMISSION | Aisin A460 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears | Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears |
| ENGINE | Isuzu 4J1-TC turbocharged intercooled diesel | Isuzu 4HK1-TC turbocharged intercooled diesel |
| Displacement | 3.0L (183 in. ³) | 5.2L (317 in. ³) |
| Engine Power | 150hp @ 2,800 rpm | 215hp @ 2,500 rpm |
| Engine Torque | 282 lb.-ft. @ 1,600-2,800 rpm | 452 lb.-ft. @ 1,850 rpm |
| Oil Level Indicator | Dash-mounted oil level check switch and light | Dash-mounted oil level check switch and light |
| LIMITED SLIP DIFFERENTIAL | Optional | Optional |
| ALTERNATOR | 140-amp | 140-amp |
| BATTERIES | 2 Maintenance-Free 750-CCA | 2 Maintenance-Free 750-CCA |
| TIRES LRR (Low Rolling Resistance) | 215/85R16E (10-pr) Standard | 215/85R16E (10-pr) Standard |
| STEERING | Integral Hydraulic Power | Integral Hydraulic Power |
| STEERING COLUMN | Tilt and Telescopic | Tilt and Telescopic |
| FUEL TANK | | |
| Standard | 30 Gal. in-rail | 30 Gal. in-rail |
| Optional | N/A | 33 Gal. side mount (176" WB Only) |
| FUEL/WATER SEPARATOR | Dual fuel filter with dash mounted indicator light | Dual fuel filter with dash mounted indicator light |

NPR-HD CREW CAB

| | |
|---|---|
| 14,500/20,500 lbs. | 16,000 lbs./22,000 lbs. |
| 7,766-7,832 lbs. | 9,410-9,607 lbs. |
| 5,360 lbs. | 6,630 lbs. |
| 9,880 lbs. | 11,020 lbs. |
| 6,830 lbs. | 6,830 lbs. |
| 11,020 lbs. | 11,020 lbs. |
| 4.555 | 4.777 |
| Tapered/Multi-Leaf | Tapered/Multi-Leaf |
| 6,830/9,880 lbs. | 8,440/14,308 lbs. |
| 11.89 in. ³ | 7.20 in. ³ |
| 523,160 lb.-ft./in. | 316,800 lb.-ft./in. |
| Vacuum/Hydraulic with 4-Channel ABS Disc/Drum | Vacuum/Hydraulic with 4-Channel ABS Disc/Drum |
| Standard | Standard |
| Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears | Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears |
| Isuzu 4HK1-TC turbocharged intercooled diesel | Isuzu 4HK1-TC turbocharged intercooled diesel |
| 5.2L (317 in. ³) | 5.2L (317 in. ³) |
| 215hp @ 2,500 rpm | 215hp @ 2,500 rpm |
| 452 lb.-ft. @ 1,850 rpm | 452 lb.-ft. @ 1,850 rpm |
| Dash-mounted oil level check switch and light | Dash-mounted oil level check switch and light |
| Optional | Optional |
| 140-amp | 140-amp |
| 2 Maintenance-Free 750-CCA | 2 Maintenance-Free 750-CCA |
| 215/85R16E (10-pr) Standard | 225/70R19.5F (12-pr) Standard |
| Integral Hydraulic Power | Integral Hydraulic Power |
| Tilt and Telescopic | Tilt and Telescopic |
| 30 Gal. in-rail | 30 Gal. in-rail |
| N/A | 33 Gal. side mount (176" WB Only) |
| Dual fuel filter with dash mounted indicator light | Dual fuel filter with dash mounted indicator light |

DIESEL N-SERIES NPR-XD**SPECIFICATIONS***(Continued)*

| | | |
|---|---|---|
| GVWR/GCWR | 16,000 lbs./22,000 lbs. | 17,950/23,950 lbs. |
| BODY/PAYLOAD ALLOWANCE | 8,840-8,905 lbs. | 10,939-11,461 lbs. |
| GAWR | | |
| Front | 6,630 lbs. | 6,830 lbs. |
| Rear | 11,020 lbs. | 12,980 lbs. |
| FRONT AXLE CAPACITY | 6,830 lbs. | 6,830 lbs. |
| REAR AXLE CAPACITY | 11,020 lbs. | 14,550 lbs. |
| Ratio | 4.777 | 5.125 |
| SUSPENSION F/R SPRINGS | Tapered/Multi-Leaf | Tapered/Multi-Leaf |
| Capacity | 8,440/14,308 lbs. | 8,440/14,550 lbs. |
| FRAME | | |
| Section Modulus | 11.89 in. ³ | 7.20 in. ³ |
| Resistance Bending Moment | 523,160 lb.-ft./in. | 316,800 lb.-ft./in. |
| SERVICE BRAKES | Vacuum/Hydraulic with | Hydraulic Boosted with |
| Front/Rear | 4-Channel ABS Disc/Drum | 4-Channel ABS Disc/Drum |
| EXHAUST BRAKE | Standard | Standard |
| TRANSMISSION | Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears | Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears |
| ENGINE | Isuzu 4HK1-TC turbocharged intercooled diesel | Isuzu 4HK1-TC turbocharged intercooled diesel |
| Displacement | 5.2L (317 in. ³) | 5.2L (317 in. ³) |
| Engine Power | 215hp @ 2,500 rpm | 215hp @ 2,500 rpm |
| Engine Torque | 452 lb.-ft. @ 1,850 rpm | 452 lb.-ft. @ 1,850 rpm |
| Oil Level Indicator | Dash-mounted oil level check switch and light | Dash-mounted oil level check switch and light |
| LIMITED SLIP DIFFERENTIAL | Optional | Optional |
| ALTERNATOR | 140-amp | 140-amp |
| BATTERIES | 2 Maintenance-Free 750-CCA | 2 Maintenance-Free 750-CCA |
| TIRES LRR (Low Rolling Resistance) | 225/70R19.5F (12-pr) Standard | 225/70R19.5F (12-pr) Standard |
| STEERING | Integral Hydraulic Power | Integral Hydraulic Power |
| STEERING COLUMN | Tilt and Telescopic | Tilt and Telescopic |
| FUEL TANK | | |
| Standard | 30 Gal. in-rail | 30 Gal. in-rail |
| Optional | N/A | 33 Gal. side mount (176" WB Only) |
| FUEL/WATER SEPARATOR | Dual fuel filter with dash mounted indicator light | Dual fuel filter with dash mounted indicator light |

NQR**NQR****CREW CAB**

| | |
|---|---|
| 17,950/23,950 lbs. | 19,500/25,500 lbs. |
| 10,680-10,748 lbs. | 12,294-12,875 lbs. |
| 6,830 lbs. | 7,275 lbs. |
| 12,980 lbs. | 13,660 lbs. |
| 6,830 lbs. | 7,275 lbs. |
| 14,550 lbs. | 14,550 lbs. |
| 5.125 | 5.571 |
| Tapered/Multi-Leaf | Tapered/Multi-Leaf |
| 8,440/14,550 lbs. | 8,440/14,550 lbs. |
| 11.89 in. ³ | 7.20 in. ³ |
| 523,160 lb.-ft./in. | 316,800 lb.-ft./in. |
| Hydraulic Boosted with | Hydraulic Boosted with |
| 4-Channel ABS Disc/Drum | 4-Channel ABS Disc/Drum |
| Standard | Standard |
| Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears | Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears |
| Isuzu 4HK1-TC turbocharged intercooled diesel | Isuzu 4HK1-TC turbocharged intercooled diesel |
| 5.2L (317 in. ³) | 5.2L (317 in. ³) |
| 215hp @ 2,500 rpm | 215hp @ 2,500 rpm |
| 452 lb.-ft. @ 1,850 rpm | 452 lb.-ft. @ 1,850 rpm |
| Dash-mounted oil level check switch and light | Dash-mounted oil level check switch and light |
| Optional | Optional |
| 140-amp | 140-amp |
| 2 Maintenance-Free 750-CCA | 2 Maintenance-Free 750-CCA |
| 225/70R19.5F (12-pr) Standard | 225/70R19.5F (12-pr) Standard |
| Integral Hydraulic Power | Integral Hydraulic Power |
| Tilt and Telescopic | Tilt and Telescopic |
| 30 Gal. in-rail | 30 Gal. in-rail |
| N/A | 33 Gal. side mount (176" WB Only) |
| Dual fuel filter with dash mounted indicator light | Dual fuel filter with dash mounted indicator light |


NRR

ISUZU

NPR

STANDARD CAB

| | |
|---|-----------------------------------|
| GVWR/GCWR | 12,000/18,000 lbs. |
| BODY/PAYLOAD ALLOWANCE | 6,782 - 6,978 lbs. |
| GAWR | |
| Front | 4,860 lbs. |
| Rear | 8,840 lbs. |
| FRONT AXLE CAPACITY | 6,830 lbs. |
| REAR AXLE CAPACITY | 11,020 lbs. |
| Ratio | 5.125 |
| SUSPENSION F/R SPRINGS | Tapered/Multi-Leaf |
| Capacity | 8,440/12,900 lbs. |
| FRAME | |
| Section Modulus | 7.20 in. ³ |
| Resistance Bending Moment | 316,800 lb.-ft./in. |
| SERVICE BRAKES | Vacuum/Hydraulic with |
| Front/Rear | 4-Channel ABS Disc/Drum |
| TRANSMISSION | 6L90 6-speed auto. with |
| | double overdrive and |
| | lock-up converter |
| ENGINE | GMPT L96 (Gen IV) V8 Vortec |
| | 6000 (Optional: KL8 - Alternative |
| | Fuel Capable Engine) |
| Displacement | 6.0L (365 in. ³) |
| Engine Power | 297hp @ 4,300 rpm |
| Engine Torque | 372 lb.-ft. @ 4,000 rpm |
| LIMITED SLIP DIFFERENTIAL | Optional |
| ALTERNATOR | 145-amp |
| BATTERIES | 1 Maintenance-Free |
| | 750-CCA |
| TIRES LRR (Low Rolling Resistance) | 215/85R16E (10-pr) |
| | Standard |
| STEERING | Integral Hydraulic Power |
| STEERING COLUMN | Tilt and Telescopic |
| FUEL TANK | |
| Standard | 30 Gal. in-frame |

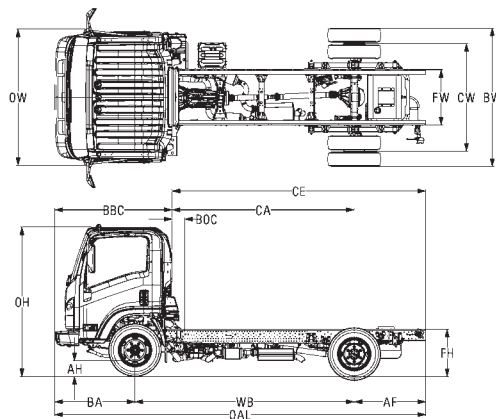


| Wheelbase (in.) | Cab to Axle (in.) | Cab to End of Frame (in.) | Back of Cab (in.) | Overall Length (in.) | Body Length (ft.) | Overall Width (in.) | Axle Width (in.) | Overall Height (in.) |
|-----------------|-------------------|---------------------------|-------------------|----------------------|-------------------|---------------------|------------------|----------------------|
| 109.0 | 86.5 | 129.6 | 6.5 | 200.5 | 10-12 | 81.3 | 65.6 | 90.0 |
| 132.5 | 110.0 | 153.1 | 6.5 | 224.0 | 14 | 81.3 | 65.6 | 90.0 |
| 150.0 | 127.5 | 170.6 | 6.5 | 241.5 | 16-18 | 81.3 | 65.6 | 90.0 |
| 176.0 | 153.5 | 196.6 | 6.5 | 267.5 | 18-20 | 81.3 | 65.6 | 90.0 |

2016 ISUZU N-SERIES GAS
WARRANTY COVERAGE AT A GLANCE

| Vehicle Coverage | Warranty Limitations (Time or Mileage, Whichever Comes First)* | | Percentage Of Dealer's Normal Charge Paid By Owner | |
|--|---|----------------|--|-----------|
| | Time in years* | Vehicle miles* | Parts | Labor |
| Basic (See "What's covered") | 0-3 Years | 0-36,000 | No Charge | No Charge |
| Engine | 0-5 Years | 0-75,000 | No Charge | No Charge |
| • Transmission | 0-5 Years | 0-75,000 | No Charge | No Charge |
| • Drive Axle | | | | |
| • Driveshaft | | | | |
| • Front Axle I-Beam | | | | |
| • Crossmembers | 0-3 Years | 0-36,000 | No Charge | No Charge |
| Frame Rails | | | | |
| Federal Emissions | 3-5 Years | Unlimited | 50% | 50% |
| Engine Emissions Control System (NPR model) California | 0-5 Years | 0-50,000 | No Charge | No Charge |
| Engine Emissions Control System (NPR model) California | 0-3 Years | 0-50,000 | No Charge | No Charge |
| Engine Emissions Control System (NPR model) California | 0-7 Years | 0-70,000 | No Charge | No Charge |
| Tires | 0-2 Years | 0-24,000 | No Charge | No Charge |
| Corrosion (Rust Through) | 0-4 Years | Unlimited | No Charge | No Charge |

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
See your authorized Isuzu dealer for warranty details.

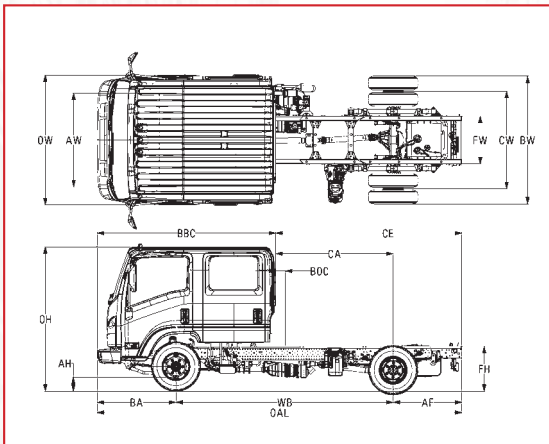

| Wheelbase (in.) | Cab to Axle (in.) | Cab to End of Frame (in.) | Back of Cab (in.) | Overall Length (in.) | Body Length (ft.) | Overall Width (in.) | Axle Width (in.) | Overall Height (in.) |
|-----------------|-------------------|---------------------------|-------------------|----------------------|-------------------|---------------------|------------------|----------------------|
| 150.0 | 88.5 | 131.6 | 5.0 | 241.5 | 12 | 81.3 | 65.6 | 90.0 |
| 176.0 | 114.5 | 157.6 | 5.0 | 267.5 | 16 | 81.3 | 65.6 | 90.0 |

2016 ISUZU N-SERIES GAS WARRANTY COVERAGE AT A GLANCE

| Vehicle Coverage | Warranty Limitations (Time or Mileage, Whichever Comes First)* | | Percentage Of Dealer's Normal Charge Paid By Owner | |
|--|---|----------------|--|-----------|
| | Time in years* | Vehicle miles* | Parts | Labor |
| Basic (See "What's covered") | 0-3 Years | 0-36,000 | No Charge | No Charge |
| Engine | 0-5 Years | 0-75,000 | No Charge | No Charge |
| • Transmission | 0-5 Years | 0-75,000 | No Charge | No Charge |
| • Drive Axle | | | | |
| • Driveshaft | | | | |
| • Front Axle I-Beam | | | | |
| • Crossmembers | | | | |
| Frame Rails | 0-3 Years | 0-36,000 | No Charge | No Charge |
| | 3-5 Years | Unlimited | 50% | 50% |
| Federal Emissions | 0-5 Years | 0-50,000 | No Charge | No Charge |
| Engine Emissions Control System (NPR model) California | 0-3 Years | 0-50,000 | No Charge | No Charge |
| Engine Emissions Control System (NPR model) California | | | | |
| Tires | 0-2 Years | 0-24,000 | No Charge | No Charge |
| Corrosion (Rust-Through) | 0-4 Years | Unlimited | No Charge | No Charge |

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
See your authorized Isuzu dealer for warranty details.

ISUZU

NPR

CREW CAB


| | |
|------------------------------------|--|
| GVWR/GCWR | 12,000/18,000 lbs. |
| BODY/PAYLOAD ALLOWANCE | 6,246 - 6,308 lbs. |
| GAWR | |
| Front | 4,860 lbs. |
| Rear | 8,840 lbs. |
| FRONT AXLE CAPACITY | 6,830 lbs. |
| REAR AXLE CAPACITY | 11,020 lbs. |
| Ratio | 5.125 |
| SUSPENSION F/R SPRINGS | Tapered/Multi-Leaf |
| Capacity | 8,440/12,900 lbs. |
| FRAME | |
| Section Modulus | 7.20 in. ³ |
| Resistance Bending Moment | 316,800 lb.-ft./in. |
| SERVICE BRAKES | Vacuum/Hydraulic with |
| Front/Rear | 4-Channel ABS Disc/Drum |
| TRANSMISSION | 6L90 6-speed auto. with double overdrive and lock-up converter |
| ENGINE | GMPT L96 (Gen IV) V8 Vortec 6000 (Optional: KL8 - Alternative Fuel Capable Engine) |
| Displacement | 6.0L (365 in. ³) |
| Engine Power | 297hp @ 4,300 rpm |
| Engine Torque | 372 lb.-ft. @ 4,000 rpm |
| LIMITED SLIP DIFFERENTIAL | Optional |
| ALTERNATOR | 145-amp |
| BATTERIES | 1 Maintenance-Free 750-CCA |
| TIRES LRR (Low Rolling Resistance) | 215/85R16E (10-pr) Standard |
| STEERING | Integral Hydraulic Power |
| STEERING COLUMN | Tilt and Telescopic |
| FUEL TANK | |
| Standard | 30 Gal. in-frame |



ISUZU NPR HD

STANDARD CAB

| | |
|---|--|
| GVWR/GCWR | 14,500/20,500 lbs. |
| BODY/PAYLOAD ALLOWANCE | 8,977 - 9,174 lbs. |
| GAWR | |
| Front | 6,630 lbs. |
| Rear | 11,020 lbs. |
| FRONT AXLE CAPACITY | 6,830 lbs. |
| REAR AXLE CAPACITY | 11,020 lbs. |
| Ratio | 5.375 |
| SUSPENSION F/R SPRINGS | Tapered/Multi-Leaf |
| Capacity | 8,440/12,900 lbs. |
| FRAME | |
| Section Modulus | 7.20 in. ³ |
| Resistance Bending Moment | 316,800 lb.-ft./in. |
| SERVICE BRAKES | Vacuum/Hydraulic with |
| Front/Rear | 4-Channel ABS Disc/Drum |
| TRANSMISSION | 6L90 6-speed auto, with double overdrive and lock-up converter |
| ENGINE | GMPT L96 (Gen IV) V8 Vortec 6000 (Optional: KL8 - Alternative Fuel Capable Engine) |
| Displacement | 6.0L (365 in. ³) |
| Engine Power | 297hp @ 4,300 rpm |
| Engine Torque | 372 lb.-ft. @ 4,000 rpm |
| LIMITED SLIP DIFFERENTIAL | Optional |
| ALTERNATOR | 145-amp |
| BATTERIES | 1 Maintenance-Free 750-CCA |
| TIRES LRR (Low Rolling Resistance) | 225/70R19.5G (14-pr) Standard |
| STEERING | Integral Hydraulic Power |
| STEERING COLUMN | Tilt and Telescopic |
| FUEL TANK | |
| Standard | 30 Gal. in-frame |

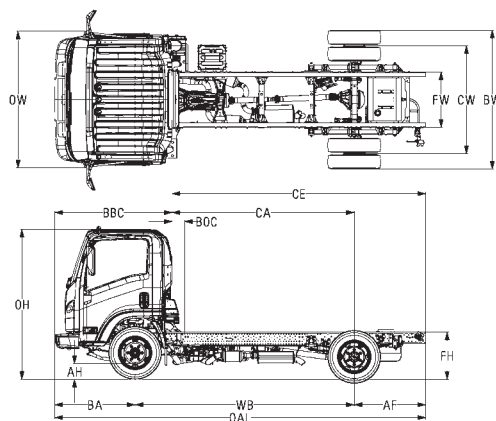


| Wheelbase (in.) | Cab to Axle (in.) | Cab to End of Frame (in.) | Back of Cab (in.) | Overall Length (in.) | Body Length (ft.) | Overall Width (in.) | Axle Width (in.) | Overall Height (in.) |
|-----------------|-------------------|---------------------------|-------------------|----------------------|-------------------|---------------------|------------------|----------------------|
| 109.0 | 86.5 | 129.6 | 6.5 | 200.5 | 10-12 | 81.3 | 65.6 | 90.9 |
| 132.5 | 110.0 | 153.1 | 6.5 | 224.0 | 14 | 81.3 | 65.6 | 90.9 |
| 150.0 | 127.5 | 170.6 | 6.5 | 241.5 | 16-18 | 81.3 | 65.6 | 90.9 |
| 176.0 | 153.5 | 196.6 | 6.5 | 267.5 | 18-20 | 81.3 | 65.6 | 90.9 |

2016 ISUZU N-SERIES GAS WARRANTY COVERAGE AT A GLANCE

| Vehicle Coverage | Warranty Limitations (Time or Mileage, Whichever Comes First)* | | Percentage Of Dealer's Normal Charge Paid By Owner | |
|------------------------------|---|----------------|--|-----------|
| | Time in years* | Vehicle miles* | Parts | Labor |
| Basic (See "What's covered") | 0-3 Years | 0-36,000 | No Charge | No Charge |
| Engine | 0-5 Years | 0-75,000 | No Charge | No Charge |
| • Transmission | 0-5 Years | 0-75,000 | No Charge | No Charge |
| • Drive Axle | | | | |
| • Driveshaft | | | | |
| • Front Axle I-Beam | | | | |
| • Crossmembers | 0-3 Years | 0-36,000 | No Charge | No Charge |
| Frame Rails | | | | |
| Federal Emissions | | | | |
| Tires | 0-2 Years | 0-24,000 | No Charge | No Charge |
| Corrosion (Rust Through) | 0-4 Years | Unlimited | No Charge | No Charge |

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
See your authorized Isuzu dealer for warranty details.



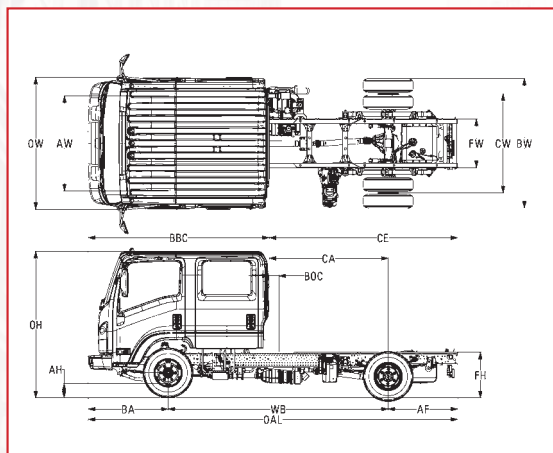

| Wheelbase (in.) | Cab to Axle (in.) | Cab to End of Frame (in.) | Back of Cab (in.) | Overall Length (in.) | Body Length (ft.) | Overall Width (in.) | Axle Width (in.) | Overall Height (in.) |
|-----------------|-------------------|---------------------------|-------------------|----------------------|-------------------|---------------------|------------------|----------------------|
| 150.0 | 88.5 | 131.6 | 5.0 | 241.5 | 12 | 81.3 | 65.6 | 91.1 |
| 176.0 | 114.5 | 157.6 | 5.0 | 267.5 | 16 | 81.3 | 65.6 | 91.1 |

2016 ISUZU N-SERIES GAS WARRANTY COVERAGE AT A GLANCE

| Vehicle Coverage | Warranty Limitations (Time or Mileage, Whichever Comes First)* | | Percentage Of Dealer's Normal Charge Paid By Owner | |
|------------------------------|---|----------------|--|-----------|
| | Time in years* | Vehicle miles* | Parts | Labor |
| Basic (See "What's covered") | 0-3 Years | 0-36,000 | No Charge | No Charge |
| Engine | 0-5 Years | 0-75,000 | No Charge | No Charge |
| • Transmission | 0-5 Years | 0-75,000 | No Charge | No Charge |
| • Drive Axle | | | | |
| • Driveshaft | | | | |
| • Front Axle I-Beam | 0-5 Years | 0-75,000 | No Charge | No Charge |
| • Crossmembers | | | | |
| Frame Rails | 0-3 Years | 0-36,000 | No Charge | No Charge |
| Federal Emissions | 3-5 Years | Unlimited | 50% | 50% |
| | 0-5 Years | 0-50,000 | No Charge | No Charge |
| Tires | 0-2 Years | 0-24,000 | No Charge | No Charge |
| Corrosion (Rust-Through) | 0-4 Years | Unlimited | No Charge | No Charge |

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
See your authorized Isuzu dealer for warranty details.

ISUZU NPR HD

CREW CAB

| | |
|------------------------------------|--|
| GVWR/GCWR | 14,500/20,500 lbs. |
| BODY/PAYLOAD ALLOWANCE | 8,442 - 8,503 lbs. |
| GAWR | |
| Front | 6,630 lbs. |
| Rear | 11,020 lbs. |
| FRONT AXLE CAPACITY | 6,830 lbs. |
| REAR AXLE CAPACITY | 11,020 lbs. |
| Ratio | 5.375 |
| SUSPENSION F/R SPRINGS | Tapered/Multi-Leaf |
| Capacity | 8,440/12,900 lbs. |
| FRAME | |
| Section Modulus | 7.20 in. ³ |
| Resistance Bending Moment | 316,800 lb.-ft./in. |
| SERVICE BRAKES | Vacuum/Hydraulic with 4-Channel ABS Disc/Drum |
| Front/Rear | |
| TRANSMISSION | 6L90 6-speed auto. with double overdrive and lock-up converter |
| ENGINE | GMPT L96 (Gen IV) V8 Vortec 6000 (Optional: KL8 - Alternative Fuel Capable Engine) |
| Displacement | 6.0L (365 in. ³) |
| Engine Power | 297hp @ 4,300 rpm |
| Engine Torque | 372 lb.-ft. @ 4,000 rpm |
| LIMITED SLIP DIFFERENTIAL | Optional |
| ALTERNATOR | 145-amp |
| BATTERIES | 1 Maintenance-Free 750-CCA |
| TIRES LRR (Low Rolling Resistance) | 225/70R19.5G (14-pr) Standard |
| STEERING | Integral Hydraulic Power |
| STEERING COLUMN | Tilt and Telescopic |
| FUEL TANK | 30 Gal. in-frame |
| Standard | |





ISUZU

NPR

STANDARD CAB

| | |
|------------------------------------|---|
| GVWR/GCWR | 13,000/19,000 lbs. |
| BODY/PAYLOAD ALLOWANCE | 7,435 - 7,607 lbs. |
| GAWR | |
| Front | 5,360 lbs. |
| Rear | 9,880 lbs. |
| FRONT AXLE CAPACITY | 6,830 lbs. |
| REAR AXLE CAPACITY | 11,020 lbs. |
| Ratio | 5.125 |
| SUSPENSION F/R SPRINGS | Tapered/Multi-Leaf |
| Capacity | 6,830/9,880 lbs. |
| FRAME | |
| Section Modulus | 7.20 in. ³ |
| Resistance Bending Moment | 316,800 lb.-ft./in. |
| SERVICE BRAKES | Vacuum/Hydraulic with 4-Channel ABS Disc/Drum |
| Front/Rear | |
| EXHAUST BRAKE | Standard |
| TRANSMISSION | Aisin A460 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears |
| ENGINE | Isuzu 4JJ1-TC turbocharged intercooled diesel |
| Displacement | 3.0L (183 in. ³) |
| Engine Power | 150hp @ 2,800 rpm |
| Engine Torque | 282 lb.-ft. @ 1,600-2,800 rpm |
| Oil Level Indicator | Dash-mounted oil level check switch and light |
| LIMITED SLIP DIFFERENTIAL | Optional |
| ALTERNATOR | 140-amp |
| BATTERIES | 2 Maintenance-Free 750-CCA |
| TIRES LRR (Low Rolling Resistance) | 215/85R16E (10-pr) Standard |
| STEERING | Integral Hydraulic Power |
| STEERING COLUMN | Tilt and Telescopic |
| FUEL TANK | |
| Standard | 30 Gal. in-rail |
| FUEL/WATER SEPARATOR | Dual fuel filter with dash mounted indicator light |

DIESEL

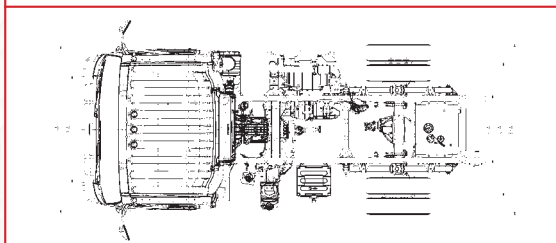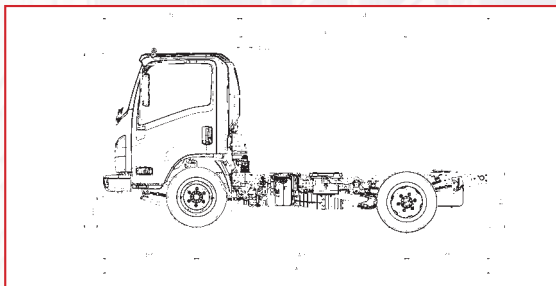

| Wheelbase (in.) | Cab to Axle (in.) | Cab to End of Frame (in.) | Back of Cab (in.) | Overall Length (in.) | Body Length (ft.) | Overall Width (in.) | Axle Width (in.) | Overall Height (in.) |
|-----------------|-------------------|---------------------------|-------------------|----------------------|-------------------|---------------------|------------------|----------------------|
| 109.0 | 86.5 | 129.6 | 6.1 | 200.5 | 10-12 | 81.3 | 65.6 | 90.8 |
| 132.5 | 110.0 | 153.1 | 6.1 | 224.0 | 14 | 81.3 | 65.6 | 90.8 |
| 150.0 | 127.5 | 170.6 | 6.1 | 241.5 | 16-18 | 81.3 | 65.6 | 90.8 |
| 176.0 | 153.5 | 196.6 | 6.1 | 267.5 | 18-20 | 81.3 | 65.6 | 90.8 |

2016 ISUZU N-SERIES DIESEL
WARRANTY COVERAGE AT A GLANCE

| Vehicle Coverage | Warranty Limitations (Time or Mileage, Whichever Comes First)* | | Percentage Of Dealer's Normal Charge Paid By Owner | |
|---|---|----------------|--|-----------|
| | Time in years* | Vehicle miles* | Parts | Labor |
| Basic | 0-3 Years | Unlimited | No Charge | No Charge |
| Engine | 0-3 Years | Unlimited | No Charge | No Charge |
| • Transmission | 0-3 Years | Unlimited | No Charge | No Charge |
| • Drive Axle | | | | |
| • Driveshaft | | | | |
| • Front Axle I-Beam | | | | |
| • Crossmembers | | | | |
| • Flywheel Housing | 0-4 Years | Unlimited | No Charge | No Charge |
| • Clutch Housing | | | | |
| Frame Rails | 0-3 Years | Unlimited | No Charge | No Charge |
| Engine Emissions Control System - Federal | 3-5 Years | 0-100,000 | 50% | 50% |
| Tires | 0-5 Years | Unlimited | No Charge | No Charge |
| Corrosion (Rust Through) | 0-2 Years | 0-24,000 | No Charge | No Charge |

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
See your authorized Isuzu dealer for warranty details.



ISUZU

NPR

13,000 lbs.
CLASS LEADING
PAYLOAD




Priced lower than a Class 4 truck

- Class leading payload 7,435 - 7,607 lbs.
- Accepts body lengths up to 20 feet
- Tighter turning radius with a 49.5 degree wheel cut angle
- Outstanding driver visibility and maneuverability
- 30 gallon rear mounted in-rail fuel tank
- 33.5" industry standard frame accepts bodies up to 102" wide and up to 91" body height
- Four wheelbases: 109", 132.5", 150", 176"
- 3.0L 150HP diesel with class-leading fuel economy, a B-10 diesel engine life of 310,000 miles and B20 biodiesel capable
- Aisin A460 6-speed automatic transmission with double overdrive and PTO capable

ISUZU NPR HD

STANDARD CAB

| | |
|---|---|
| GVWR/GCWR | 14,500/20,500 lbs. |
| BODY/PAYLOAD ALLOWANCE | 8,339-8,536 lbs. |
| GAWR | |
| Front | 5,360 lbs. |
| Rear | 9,880 lbs. |
| FRONT AXLE CAPACITY | 6,830 lbs. |
| REAR AXLE CAPACITY | 11,020 lbs. |
| Ratio | 4.555 |
| SUSPENSION F/R SPRINGS | Tapered/Multi-Leaf |
| Capacity | 6,830/9,880 lbs. |
| FRAME | |
| Section Modulus | 7.20 in. ³ |
| Resistance Bending Moment | 316,800 lb.-ft./in. |
| SERVICE BRAKES | Vacuum/Hydraulic with |
| Front/Rear | 4-Channel ABS Disc/Drum |
| EXHAUST BRAKE | Standard |
| TRANSMISSION | Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears |
| ENGINE | Isuzu 4HK1-TC turbocharged intercooled diesel |
| Displacement | 5.2L (317 in. ³) |
| Engine Power | 215hp @ 2,500 rpm |
| Engine Torque | 452 lb.-ft. @ 1,850 rpm |
| Oil Level Indicator | Dash-mounted oil level check switch and light |
| LIMITED SLIP DIFFERENTIAL | Optional |
| ALTERNATOR | 140-amp |
| BATTERIES | 2 Maintenance-Free 750-CCA |
| TIRES LRR (Low Rolling Resistance) | 215/85R16E (10-pr) Standard |
| STEERING | Integral Hydraulic Power |
| STEERING COLUMN | Tilt and Telescopic |
| FUEL TANK | |
| Standard | 30 Gal. in-rail |
| Optional | 33 Gal. side mount (176" WB Only) |
| FUEL/WATER SEPARATOR | Dual fuel filter with dash mounted indicator light |

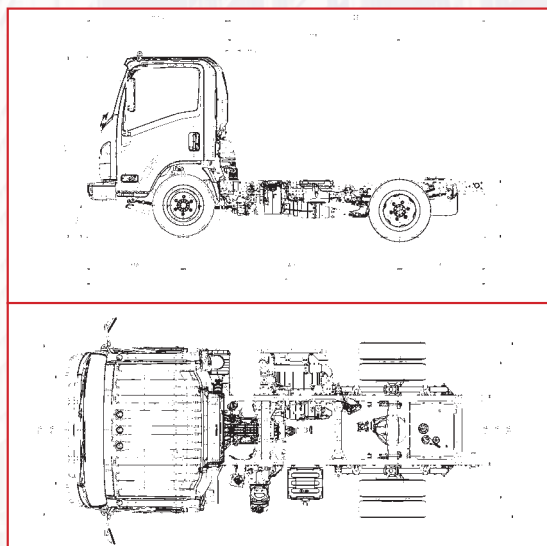

| Wheelbase (in.) | Cab to Axle (in.) | Cab to End of Frame (in.) | Back of Cab (in.) | Overall Length (in.) | Body Length (ft.) | Overall Width (in.) | Axle Width (in.) | Overall Height (in.) |
|-----------------|-------------------|---------------------------|-------------------|----------------------|-------------------|---------------------|------------------|----------------------|
| 109.0 | 86.5 | 129.6 | 7.7 | 200.5 | 10-12 | 81.3 | 65.6 | 90.8 |
| 132.5 | 110.0 | 153.1 | 7.7 | 224.0 | 14 | 81.3 | 65.6 | 90.8 |
| 150.0 | 127.5 | 170.6 | 10.2 | 241.5 | 16-18 | 81.3 | 65.6 | 90.8 |
| 176.0 | 153.5 | 196.6 | 10.2 | 267.5 | 18-20 | 81.3 | 65.6 | 90.8 |

2017 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

| Vehicle Coverage | Warranty Limitations (Time or Mileage, Whichever Comes First)* | | Percentage Of Dealer's Normal Charge Paid By Owner | |
|--|--|----------------|--|-----------|
| | Time in years* | Vehicle miles* | Parts | Labor |
| Basic | 0-3 Years | Unlimited | No Charge | No Charge |
| Engine | 0-3 Years | Unlimited | No Charge | No Charge |
| • Transmission | 0-3 Years | Unlimited | No Charge | No Charge |
| • Drive Axle | | | | |
| • Driveshaft | | | | |
| • Front Axle I-Beam | | | | |
| • Crossmembers | | | | |
| • Flywheel Housing | 0-3 Years | Unlimited | No Charge | No Charge |
| • Clutch Housing | | | | |
| Frame Rails | | | | |
| Engine Emissions Control System - Federal | 0-3 Years | Unlimited | No Charge | No Charge |
| | 3-5 Years | 0-100,000 | 50% | 50% |
| | 0-5 Years | | No Charge | No Charge |
| Tires | 0-2 Years | 0-24,000 | No Charge | No Charge |
| | 0-4 Years | Unlimited | No Charge | No Charge |
| Corrosion (Rust-Through) | | | No Charge | No Charge |

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
See your authorized Isuzu dealer for warranty details.







ISUZU NPR^{HD}

CREW CAB

| | |
|---|--|
| GVWR/GCWR | 14,500/20,500 lbs. |
| BODY/PAYLOAD ALLOWANCE | 7,766-7,832 lbs. |
| GAWR <i>Front</i> <i>Rear</i> | 5,360 lbs. 9,880 lbs. |
| FRONT AXLE CAPACITY | 6,830 lbs. |
| REAR AXLE CAPACITY <i>Ratio</i> | 11,020 lbs. 4.555 |
| SUSPENSION F/R SPRINGS <i>Capacity</i> | Tapered/Multi-Leaf 6,830/9,880 lbs. |
| FRAME <i>Section Modulus</i> <i>Resistance Bending Moment</i> | 11.89 in. ³ 523,160 lb.-ft./in. |
| SERVICE BRAKES <i>Front/Rear</i> | Vacuum/Hydraulic with 4-Channel ABS Disc/Drum |
| EXHAUST BRAKE | Standard |
| TRANSMISSION | Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears |
| ENGINE <i>Displacement</i> <i>Engine Power</i> <i>Engine Torque</i> <i>Oil Level Indicator</i> | Isuzu 4HK1-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm Dash-mounted oil level check switch and light |
| LIMITED SLIP DIFFERENTIAL | Optional |
| ALTERNATOR | 140-amp |
| BATTERIES | 2 Maintenance-Free 750-CCA |
| TIRES LRR (Low Rolling Resistance) | 215/85R16E (10-pr) Standard |
| STEERING | Integral Hydraulic Power |
| STEERING COLUMN | Tilt and Telescopic |
| FUEL TANK <i>Standard</i> | 30 Gal. in-rail |
| FUEL/WATER SEPARATOR | Dual fuel filter with dash mounted indicator light |

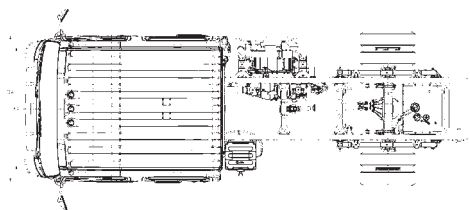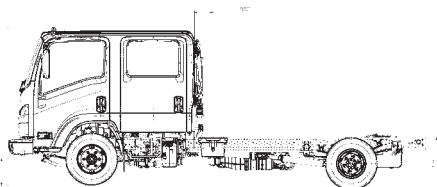

| Wheelbase (in.) | Cab to Axle (in.) | Cab to End of Frame (in.) | Back of Cab (in.) | Overall Length (in.) | Body Length (in.) | Overall Width (in.) | Overall Axle Width (in.) | Overall Height (in.) |
|-----------------|-------------------|---------------------------|-------------------|----------------------|-------------------|---------------------|--------------------------|----------------------|
| 150.0 | 88.5 | 131.6 | 5.3 | 241.5 | 12 | 81.3 | 65.6 | 90.8 |
| 176.0 | 114.5 | 157.6 | 5.3 | 267.5 | 16 | 81.3 | 65.6 | 90.8 |

2017 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE


| Vehicle Coverage | Warranty Limitations (Time or Mileage, Whichever Comes First)* | | Percentage Of Dealer's Normal Charge Paid By Owner | |
|--|--|----------------|--|-----------|
| | Time in years* | Vehicle miles* | Parts | Labor |
| Basic | 0-3 Years | Unlimited | No Charge | No Charge |
| Engine | 0-3 Years | Unlimited | No Charge | No Charge |
| • Transmission | 0-3 Years | Unlimited | No Charge | No Charge |
| • Drive Axle | | | | |
| • Driveshaft | | | | |
| • Front Axle I-Beam | | | | |
| • Crossmembers | | | | |
| • Flywheel Housing | | | | |
| • Clutch Housing | | | | |
| Frame Rails | 0-3 Years | Unlimited | No Charge | No Charge |
| Engine Emissions Control System - Federal | 3-5 Years | Unlimited | 50% | 50% |
| | 0-5 Years | 0-100,000 | No Charge | No Charge |
| Tires | 0-2 Years | 0-24,000 | No Charge | No Charge |
| Corrosion (Rust Through) | 0-4 Years | Unlimited | No Charge | No Charge |

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
See your authorized Isuzu dealer for warranty details.



STANDARD CAB

| | |
|---|---|
| GVWR/GCWR | 16,000/22,000 lbs. |
| BODY/PAYLOAD ALLOWANCE | 9,410-9,607 lbs. |
| GAWR | |
| Front | 6,630 lbs. |
| Rear | 11,020 lbs. |
| FRONT AXLE CAPACITY | 6,830 lbs. |
| REAR AXLE CAPACITY | 11,020 lbs. |
| Ratio | 4.777 |
| SUSPENSION F/R SPRINGS | Tapered/Multi-Leaf |
| Capacity | 8,440/14,308 lbs. |
| FRAME | |
| Section Modulus | 7.20 in. ³ |
| Resistance Bending Moment | 316,800 lb.-ft./in. |
| SERVICE BRAKES | Vacuum/Hydraulic with |
| Front/Rear | 4-Channel ABS Disc/Drum |
| EXHAUST BRAKE | Standard |
| TRANSMISSION | Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears |
| ENGINE | Isuzu 4HK1-TC turbocharged intercooled diesel |
| Displacement | 5.2L (317 in. ³) |
| Engine Power | 215hp @ 2,500 rpm |
| Engine Torque | 452 lb.-ft. @ 1,850 rpm |
| Oil Level Indicator | Dash-mounted oil level check switch and light |
| LIMITED SLIP DIFFERENTIAL | Optional |
| ALTERNATOR | 140-amp |
| BATTERIES | 2 Maintenance-Free 750-CCA |
| TIRES LRR (Low Rolling Resistance) | 225/70R19.5F (12-pr) Standard |
| STEERING | Integral Hydraulic Power |
| STEERING COLUMN | Tilt and Telescopic |
| FUEL TANK | |
| Standard | 30 Gal. in-rail |
| Optional | 33 Gal. side mount (176" WB Only) |
| FUEL/WATER SEPARATOR | Dual fuel filter with dash mounted indicator light |


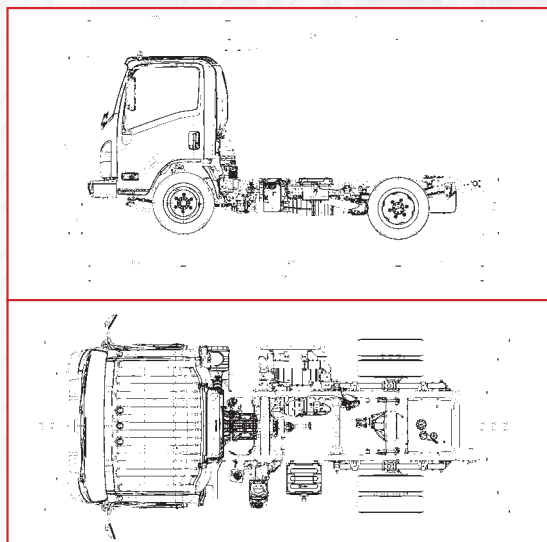


| Wheelbase (in.) | Cab to Axle (in.) | Cab to End of Frame (in.) | Back of Cab (in.) | Overall Length (in.) | Body Length (ft.) | Overall Width (in.) | Axle Width (in.) | Overall Height (in.) |
|-----------------|-------------------|---------------------------|-------------------|----------------------|-------------------|---------------------|------------------|----------------------|
| 109.0 | 86.5 | 129.6 | 7.7 | 200.5 | 10-12 | 81.3 | 65.6 | 92.4 |
| 132.5 | 110.0 | 153.1 | 7.7 | 224.0 | 14 | 81.3 | 65.6 | 92.4 |
| 150.0 | 127.5 | 170.6 | 7.7 | 241.5 | 16-18 | 81.3 | 65.6 | 92.4 |
| 176.0 | 153.5 | 196.6 | 7.7 | 267.5 | 18-20 | 81.3 | 65.6 | 92.4 |

2017 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

| Vehicle Coverage | Warranty Limitations (Time or Mileage, Whichever Comes First)* | | Percentage Of Dealer's Normal Charge Paid By Owner | |
|---|---|----------------|--|-----------|
| | Time in years* | Vehicle miles* | Parts | Labor |
| Basic | 0-3 Years | Unlimited | No Charge | No Charge |
| Engine | 0-3 Years | Unlimited | No Charge | No Charge |
| • Transmission | 0-3 Years | Unlimited | No Charge | No Charge |
| • Drive Axle | | | | |
| • Driveshaft | | | | |
| • Front Axle I-Beam | | | | |
| • Crossmembers | 0-4 Years | Unlimited | No Charge | No Charge |
| • Flywheel Housing | | | | |
| • Clutch Housing | | | | |
| Frame Rails | 0-3 Years | Unlimited | No Charge | No Charge |
| Engine Emissions Control System - Federal | 3-5 Years | 0-100,000 | 50% | 50% |
| Tires | 0-2 Years | 0-24,000 | No Charge | No Charge |
| Corrosion (Rust Through) | 0-4 Years | Unlimited | No Charge | No Charge |

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
See your authorized Isuzu dealer for warranty details.

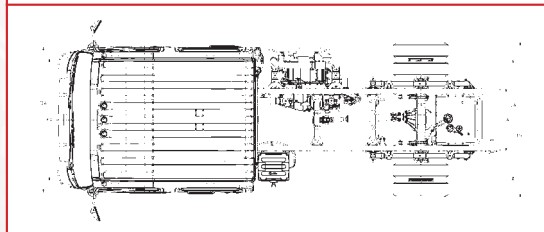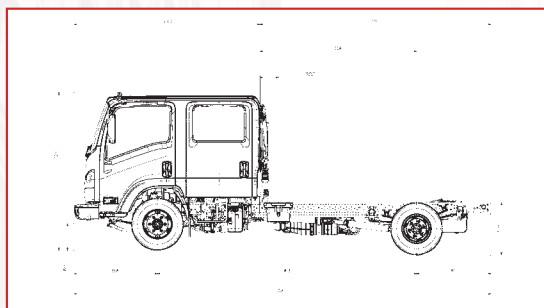

| Wheelbase (in.) | Cab to Axle (in.) | Cab to End of Frame (in.) | Back of Cab (in.) | Overall Length (in.) | Body Length (ft.) | Overall Width (in.) | Axle Width (in.) | Overall Height (in.) |
|-----------------|-------------------|---------------------------|-------------------|----------------------|-------------------|---------------------|------------------|----------------------|
| 150.0 | 88.5 | 131.6 | 5.3 | 241.5 | 12 | 81.3 | 65.6 | 92.4 |
| 176.0 | 114.5 | 157.6 | 5.3 | 267.5 | 16 | 81.3 | 65.6 | 92.4 |

2017 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

| Vehicle Coverage | Warranty Limitations (Time or Mileage, Whichever Comes First)* | | Percentage Of Dealer's Normal Charge Paid By Owner | |
|--|--|----------------|--|-----------|
| | Time in years* | Vehicle miles* | Parts | Labor |
| Basic | 0-3 Years | Unlimited | No Charge | No Charge |
| Engine | 0-3 Years | Unlimited | No Charge | No Charge |
| • Transmission | 0-3 Years | Unlimited | No Charge | No Charge |
| • Drive Axle | | | | |
| • Driveshaft | | | | |
| • Front Axle I-Beam | | | | |
| • Crossmembers | | | | |
| • Flywheel Housing | | | | |
| • Clutch Housing | | | | |
| Frame Rails | 0-3 Years | Unlimited | No Charge | No Charge |
| Engine Emissions Control System - Federal | 3-5 Years | Unlimited | 50% | 50% |
| | 0-5 Years | 0-100,000 | No Charge | No Charge |
| Tires | 0-2 Years | 0-24,000 | No Charge | No Charge |
| Corrosion (Rust Through) | 0-4 Years | Unlimited | No Charge | No Charge |

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
See your authorized Isuzu dealer for warranty details.

ISUZU NPR XD

CREW CAB

| | |
|------------------------------------|---|
| GVWR/GCWR | 16,000/22,000 lbs. |
| BODY/PAYLOAD ALLOWANCE | 8,840-8,905 lbs. |
| GAWR | |
| Front | 6,630 lbs. |
| Rear | 11,020 lbs. |
| FRONT AXLE CAPACITY | 6,830 lbs. |
| REAR AXLE CAPACITY | 11,020 lbs. |
| Ratio | 4.777 |
| SUSPENSION F/R SPRINGS | Tapered/Multi-Leaf |
| Capacity | 8,440/14,308 lbs. |
| FRAME | |
| Section Modulus | 11.89 in. ³ |
| Resistance Bending Moment | 523,160 lb.-ft./in. |
| SERVICE BRAKES | Vacuum/Hydraulic with |
| Front/Rear | 4-Channel ABS Disc/Drum |
| EXHAUST BRAKE | Standard |
| TRANSMISSION | Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears |
| ENGINE | Isuzu 4HK1-TC turbocharged intercooled diesel |
| Displacement | 5.2L (317 in. ³) |
| Engine Power | 215hp @ 2,500 rpm |
| Engine Torque | 452 lb.-ft. @ 1,850 rpm |
| Oil Level Indicator | Dash-mounted oil level check switch and light |
| LIMITED SLIP DIFFERENTIAL | Optional |
| ALTERNATOR | 140-amp |
| BATTERIES | 2 Maintenance-Free 750-CCA |
| TIRES LRR (Low Rolling Resistance) | 225/70R19.5F (12-pr) Standard |
| STEERING | Integral Hydraulic Power |
| STEERING COLUMN | Tilt and Telescopic |
| FUEL TANK | |
| Standard | 30 Gal. in-rail |
| FUEL/WATER SEPARATOR | Dual fuel filter with dash mounted indicator light |





ISUZU

NQR

STANDARD CAB

| | |
|---|---|
| GVWR/GCWR | 17,950/23,950 lbs. |
| BODY/PAYLOAD ALLOWANCE | 10,939-11,461 lbs. |
| GAWR | |
| Front | 6,830 lbs. |
| Rear | 12,980 lbs. |
| FRONT AXLE CAPACITY | 6,830 lbs. |
| REAR AXLE CAPACITY | 14,550 lbs. |
| Ratio | 5.125 |
| SUSPENSION F/R SPRINGS | Tapered/Multi-Leaf |
| Capacity | 8,440/14,550 lbs. |
| FRAME | |
| Section Modulus | 7.20 in. ³ |
| Resistance Bending Moment | 316,800 lb.-ft./in. |
| SERVICE BRAKES | |
| Front/Rear | Hydraulic Boosted with 4-Channel ABS Disc/Drum |
| EXHAUST BRAKE | Standard |
| TRANSMISSION | |
| | Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears |
| ENGINE | |
| | Isuzu 4HK1-TC turbocharged intercooled diesel |
| Displacement | 5.2L (317 in. ³) |
| Engine Power | 215hp @ 2,500 rpm |
| Engine Torque | 452 lb.-ft. @ 1,850 rpm |
| Oil Level Indicator | Dash-mounted oil level check switch and light |
| LIMITED SLIP DIFFERENTIAL | Optional |
| ALTERNATOR | 140-amp |
| BATTERIES | 2 Maintenance-Free 750-CCA |
| TIRES LRR (Low Rolling Resistance) | 225/70R19.5F (12-pr) Standard |
| STEERING | Integral Hydraulic Power |
| STEERING COLUMN | Tilt and Telescopic |
| FUEL TANK | |
| Standard | 30 Gal. in-rail |
| Optional | 33 Gal. side mount (176" WB Only) |
| FUEL/WATER SEPARATOR | Dual fuel filter with dash mounted indicator light |

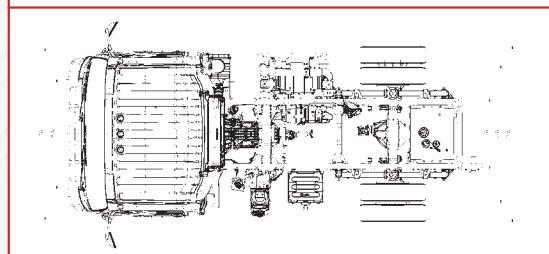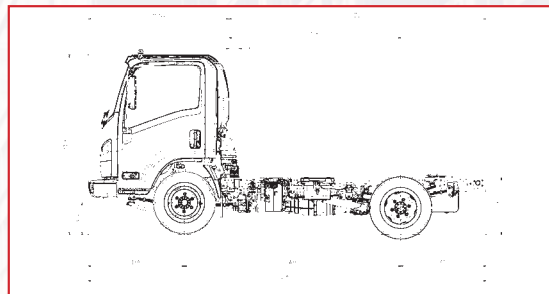


| Wheelbase (in.) | Cab to Axle (in.) | Cab to End of Frame (in.) | Back of Cab (in.) | Overall Length (in.) | Body Length (ft.) | Overall Width (in.) | Axle Width (in.) | Overall Height (in.) |
|-----------------|-------------------|---------------------------|-------------------|----------------------|-------------------|---------------------|------------------|----------------------|
| 109.0 | 86.5 | 129.6 | 7.7 | 200.5 | 10-12 | 81.3 | 65.6 | 92.4 |
| 132.5 | 110.0 | 153.1 | 7.7 | 224.0 | 14 | 81.3 | 65.6 | 92.4 |
| 150.0 | 127.5 | 170.6 | 7.7 | 241.5 | 16-18 | 81.3 | 65.6 | 92.4 |
| 176.0 | 153.5 | 196.6 | 7.7 | 267.5 | 18-20 | 81.3 | 65.6 | 92.4 |
| 200.0 | 177.5 | 220.6 | 7.7 | 291.5 | 22 | 81.3 | 65.6 | 92.4 |

2017 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

| Vehicle Coverage | Warranty Limitations (Time or Mileage, Whichever Comes First)* | | Percentage Of Dealer's Normal Charge Paid By Owner | |
|---|---|----------------|--|-----------|
| | Time in years* | Vehicle miles* | Parts | Labor |
| Basic | 0-3 Years | Unlimited | No Charge | No Charge |
| Engine | 0-3 Years | Unlimited | No Charge | No Charge |
| • Transmission | 0-3 Years | Unlimited | No Charge | No Charge |
| • Drive Axle | | | | |
| • Driveshaft | | | | |
| • Front Axle I-Beam | | | | |
| • Crossmembers | | | | |
| • Flywheel Housing | 0-3 Years | Unlimited | No Charge | No Charge |
| • Clutch Housing | | | | |
| Frame Rails | 0-3 Years | Unlimited | No Charge | No Charge |
| Engine Emissions Control System - Federal | 3-5 Years | Unlimited | 50% | 50% |
| | 0-5 Years | 0-100,000 | No Charge | No Charge |
| Tires | 0-2 Years | 0-24,000 | No Charge | No Charge |
| Corrosion (Rust Through) | 0-4 Years | Unlimited | No Charge | No Charge |

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
See your authorized Isuzu dealer for warranty details.

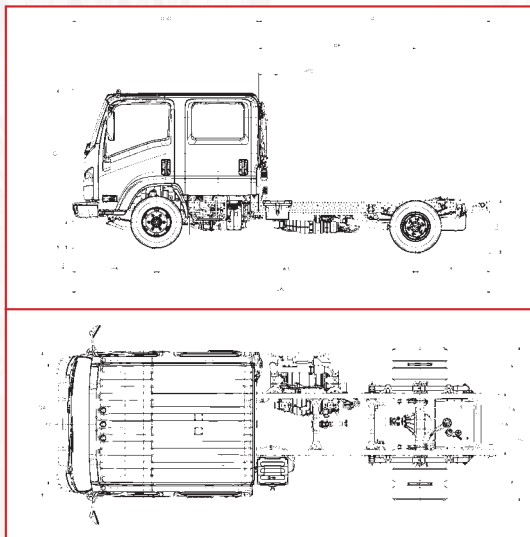

| Wheelbase (in.) | Cab to Axle (in.) | Cab to End of Frame (in.) | Back of Cab (in.) | Overall Length (in.) | Body Length (ft.) | Overall Width (in.) | Axle Width (in.) | Overall Height (in.) |
|-----------------|-------------------|---------------------------|-------------------|----------------------|-------------------|---------------------|------------------|----------------------|
| 1500 | 88.5 | 131.6 | 53 | 241.5 | 12 | 81.3 | 65.6 | 92.4 |
| 176.0 | 114.5 | 157.6 | 53 | 267.5 | 16 | 81.3 | 65.6 | 92.4 |

2017 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

| Vehicle Coverage | Warranty Limitations (Time or Mileage, Whichever Comes First)* | | Percentage Of Dealer's Normal Charge Paid By Owner | |
|---|---|----------------|--|-----------|
| | Time in years* | Vehicle miles* | Parts | Labor |
| Basic | 0-3 Years | Unlimited | No Charge | No Charge |
| Engine | 0-3 Years | Unlimited | No Charge | No Charge |
| • Transmission | 0-3 Years | Unlimited | No Charge | No Charge |
| • Drive Axle | | | | |
| • Driveshaft | | | | |
| • Front Axle I-Beam | | | | |
| • Crossmembers | | | | |
| • Flywheel Housing | | | | |
| • Clutch Housing | | | | |
| Frame Rails | 0-3 Years | Unlimited | No Charge | No Charge |
| | 3-5 Years | Unlimited | 50% | 50% |
| Engine Emissions Control System - Federal | 0-5 Years | 0-100,000 | No Charge | No Charge |
| Tires | 0-2 Years | 0-24,000 | No Charge | No Charge |
| Corrosion (Rust-Through) | 0-4 Years | Unlimited | No Charge | No Charge |

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.

See your authorized Isuzu dealer for warranty details.

ISUZU

NQR



CREW CAB

| | |
|------------------------------------|---|
| GVWR/GCWR | 17,950/23,950 lbs. |
| BODY/PAYLOAD ALLOWANCE | 10,680-10,748 lbs. |
| GAWR | |
| Front | 6,830 lbs. |
| Rear | 12,980 lbs. |
| FRONT AXLE CAPACITY | 6,830 lbs. |
| REAR AXLE CAPACITY | 14,550 lbs. |
| Ratio | 5.125 |
| SUSPENSION F/R SPRINGS | Tapered/Multi-Leaf |
| Capacity | 8,440/14,550 lbs. |
| FRAME | |
| Section Modulus | 11.89 in. ³ |
| Resistance Bending Moment | 523,160 lb.-ft./in. |
| SERVICE BRAKES | Hydraulic Boosted with 4-Channel ABS Disc/Drum |
| Front/Rear | |
| EXHAUST BRAKE | Standard |
| TRANSMISSION | Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears |
| ENGINE | Isuzu 4HK1-TC turbocharged intercooled diesel |
| Displacement | 5.2L (317 in. ³) |
| Engine Power | 215hp @ 2,500 rpm |
| Engine Torque | 452 lb.-ft. @ 1,850 rpm |
| Oil Level Indicator | Dash-mounted oil level check switch and light |
| LIMITED SLIP DIFFERENTIAL | Optional |
| ALTERNATOR | 140-amp |
| BATTERIES | 2 Maintenance-Free 750-CCA |
| TIRES LRR (Low Rolling Resistance) | 225/70R19.5F (12-pr) Standard |
| STEERING | Integral Hydraulic Power |
| STEERING COLUMN | Tilt and Telescopic |
| FUEL TANK | |
| Standard | 30 Gal. in-rail |
| FUEL/WATER SEPARATOR | Dual fuel filter with dash mounted indicator light |



STANDARD CAB

| | |
|---|---|
| GVWR/GCWR | 19,500/25,500 lbs. |
| BODY/PAYLOAD ALLOWANCE | 12,294-12,875 lbs. |
| GAWR | |
| Front | 7,275 lbs. |
| Rear | 13,660 lbs. |
| FRONT AXLE CAPACITY | 7,275 lbs. |
| REAR AXLE CAPACITY | 14,550 lbs. |
| Ratio | 5.571 |
| SUSPENSION F/R SPRINGS | Tapered/Multi-Leaf |
| Capacity | 8,440/14,550 lbs. |
| FRAME | |
| Section Modulus | 7.20 in. ³ |
| Resistance Bending Moment | 316,800 lb.-ft./in. |
| SERVICE BRAKES | Hydraulic Boosted with 4-Channel ABS Disc/Drum |
| Front/Rear | |
| EXHAUST BRAKE | Standard |
| TRANSMISSION | Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears |
| ENGINE | Isuzu 4HK1-TC turbocharged intercooled diesel |
| Displacement | 5.2L (317 in. ³) |
| Engine Power | 215hp @ 2,500 rpm |
| Engine Torque | 452 lb.-ft. @ 1,850 rpm |
| Oil Level Indicator | Dash-mounted oil level check switch and light |
| LIMITED SLIP DIFFERENTIAL | Optional |
| ALTERNATOR | 140-amp |
| BATTERIES | 2 Maintenance-Free 750-CCA |
| TIRES LRR (Low Rolling Resistance) | 225/70R19.5F (12-pr) Standard |
| STEERING | Integral Hydraulic Power |
| STEERING COLUMN | Tilt and Telescopic |
| FUEL TANK | |
| Standard | 30 Gal. in-rail |
| Optional | 33 Gal. side mount (176" WB Only) |
| FUEL/WATER SEPARATOR | Dual fuel filter with dash mounted indicator light |

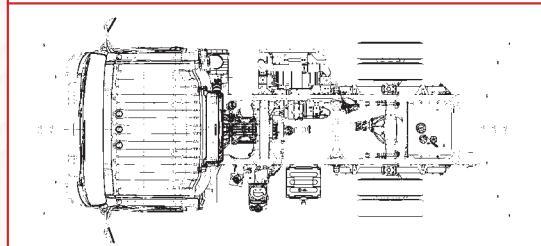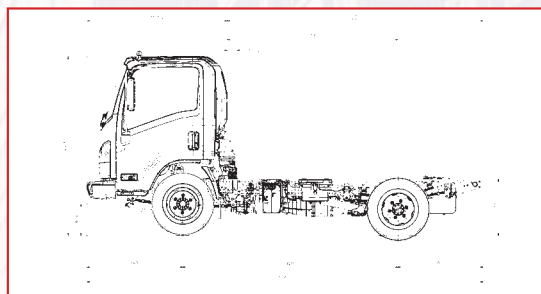

| Wheelbase (in.) | Cab to Axle (in.) | Cab to End of Frame (in.) | Back of Cab (in.) | Overall Length (in.) | Body Length (ft.) | Overall Width (in.) | Axle Width (in.) | Overall Height (in.) |
|-----------------|-------------------|---------------------------|-------------------|----------------------|-------------------|---------------------|------------------|----------------------|
| 109.0 | 86.5 | 129.6 | 7.7 | 200.5 | 10-12 | 81.3 | 65.6 | 92.4 |
| 132.5 | 110.0 | 153.1 | 7.7 | 224.0 | 14 | 81.3 | 65.6 | 92.4 |
| 150.0 | 127.5 | 170.6 | 7.7 | 241.5 | 16-18 | 81.3 | 65.6 | 92.4 |
| 176.0 | 153.5 | 196.6 | 7.7 | 267.5 | 18-20 | 81.3 | 65.6 | 92.4 |
| 200.0 | 177.5 | 220.6 | 7.7 | 291.5 | 22 | 81.3 | 65.6 | 92.4 |
| 212.0 | 189.5 | 232.6 | 7.7 | 303.5 | 24 | 81.3 | 65.6 | 92.4 |

2017 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

| Vehicle Coverage | Warranty Limitations (Time or Mileage, Whichever Comes First)* | | Percentage Of Dealer's Normal Charge Paid By Owner | |
|---|--|----------------|--|-----------|
| | Time in years* | Vehicle miles* | Parts | Labor |
| Basic | 0-3 Years | Unlimited | No Charge | No Charge |
| Engine | 0-3 Years | Unlimited | No Charge | No Charge |
| • Transmission | 0-3 Years | Unlimited | No Charge | No Charge |
| • Drive Axle | | | | |
| • Driveshaft | | | | |
| • Front Axle I-Beam | | | | |
| • Crossmembers | | | | |
| • Flywheel Housing | 0-3 Years | Unlimited | No Charge | No Charge |
| • Clutch Housing | | | | |
| Frame Rails | 0-3 Years | Unlimited | No Charge | No Charge |
| | 3-5 Years | Unlimited | 50% | 50% |
| Engine Emissions Control System - Federal | 0-5 Years | 0-100,000 | No Charge | No Charge |
| Tires | 0-2 Years | 0-24,000 | No Charge | No Charge |
| Corrosion (Rust Through) | 0-4 Years | Unlimited | No Charge | No Charge |

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date. See your authorized Isuzu dealer for warranty details.





ISUZU

NRR

BENEFITS OF THE ISUZU LOW CAB FORWARD DESIGN:

Compared to conventional cab trucks, vans and cutaways, the Isuzu Low Cab Forward design delivers:

- More cargo space available for body
- Easier access to the engine compartment with the Isuzu tilt cab design
- Remarkable maneuverability with 49.5 degree wheel cut angle for tighter turning
- Driver-friendly entry and exit with 85 degree door swing, grab handles, and entry step
- Outstanding driver visibility, see the ground within 8 ft. in front of truck
- High rigidity cab for collision safety
- Durable and dependable
- Better fuel economy
- GVWR range from 12,000 lbs. to 19,500 lbs.
- Chassis configurations to handle bodies 10 to 24 feet
- Multiple engine options: two diesel and one gas with CNG/LPG capability
- Lower cost of ownership

Learn more at your local Isuzu truck dealer.

Vehicle Service and Support Programs that Provide Remarkable Lifecycle Value



Vehicle Health Reports

Performed at each scheduled maintenance cycle, this report provides operational data that helps maximize a lower cost of ownership



PSMP

Continuing maintenance program that promotes maximum vehicle uptime



24/60K Covered Maintenance

This program provides scheduled maintenance at no cost for up to 24 months or 60,000 miles, whichever comes first.



Isuzu Financing

Competitive leasing and financing options for your budget needs

Isuzu features are designed to make the driver more comfortable and improve efficiency while enhancing productivity.



Standard Interior Seats Shown



Optional Seat Covers Shown



Crew Cab Has 7-Passenger Capacity With 4-Across Seating In Back



Optional Air Deflector



Optional Vertical Exhaust



Optional Bluetooth Radio



Optional Locking DEF Cap




Optional Additional Fuel Tank



Microphone Included With Optional Bluetooth Radio

Remote Mirror Controls Included With Optional Heated Remote Control Mirrors



Optional Heated Remote Control Mirrors